

# NEW AREAS WITH VERY HIGH GRADE ROCK CHIP RESULTS DISCOVERED AT NAPIÉ

## HIGHLIGHTS

### Napié Gold Project

- ❖ Rock chip sampling results at Tchaga North, Napié Project returned very high grade results including **79.50g/t Au, 60.66g/t Au, 44.73g/t Au, 9.47g/t Au, 9.40g/t Au, 7.45g/t Au and 6.29g/t Au**
- ❖ High-grade results are from new areas exposed by artisanal mining and are from the **newly identified east-west structural trend which has yet to be tested by drilling**
- ❖ **Wide-spaced drilling by Mako in areas with previous limited drilling would not have tested the east-west trend since drilling was done parallel to these new structures**
- ❖ Work is ongoing to complete mapping and rock-chip sampling and is **generating new high-grade targets for drill testing**

### Mako's Managing Director, Peter Ledwidge commented:

*"We are thrilled with these high-grade rock chip results at Tchaga North. The mapping and rock chip sampling program which identified the yet to be drilled east-west structures hosting gold-bearing quartz veins, indicate that we may have discovered a high-grade system at Tchaga North.*

*After the completion of the mapping/rock chip sampling program, we will prioritise the areas and plan new holes to test these structures with north-south oriented drill holes."*

**Mako Gold Limited ("Mako" or "the Company"; ASX:MKG)** is pleased to provide the first results of the ongoing mapping and rock chip sampling program at Tchaga North on the Company's 90% owned flagship Napié Project in Côte d'Ivoire.

As was recently announced, Mako geologists have been conducting a detailed geological mapping and rock chip sampling program on 100 metre spaced traverses on Tchaga North in an area approximately 6km by 3km shown as a black rectangle on Figure 1.<sup>1</sup>

The assays on the first batch of rock chip samples have returned very high-grade results including **79.50g/t Au, 60.66g/t Au, 44.73g/t Au, 9.47g/t Au, 9.40g/t Au, 7.45g/t Au and 6.29g/t Au.**

<sup>1</sup> Refer ASX release dated 29 January 2024


The samples were collected at artisanal mining sites where artisanal miners have exposed new structures with gold-bearing quartz veins. Using only hand tools and being limited by the water table means that the area disturbed by artisanal miners is relatively small. Since there is very little outcrop at Tchaga North (and elsewhere on the Napié Project), artisanal mining provides excellent new rock exposures for geological mapping and sampling. This is one of the benefits of working in Côte d'Ivoire.

The orientation of the quartz veins is predominantly east-west. The discovery of these new structures is important because the small amount of drilling done to date at Tchaga North was predominantly from west to east, therefore this **presents new targets for future drilling where drilling will be oriented towards the north perpendicular to the newly identified structures.**

**All high-grade samples were collected from spoil piles at the artisanal mining sites. These are reject piles which the miners did not process therefore true grades may be higher.**

A table with results over 0.5 g/t Au is shown in Appendix 1.


A map showing the areas sampled as well as previous drill results is shown in Figure 1. A detailed map of each area is shown in Figures 2, 4, and 5.

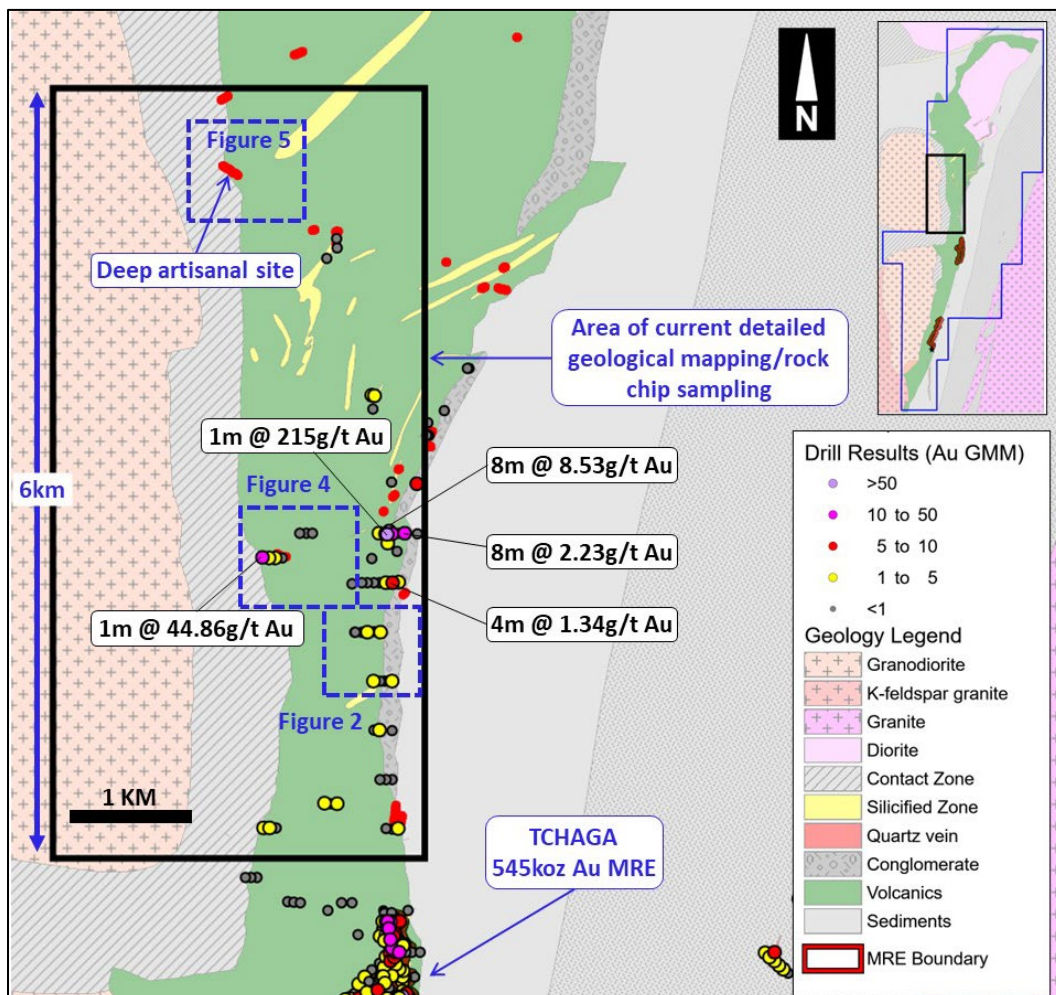

**Figure 1: Tchaga North -Detailed mapping area shown in black rectangle with previous drill results – blue dashed rectangles are areas enlarged in the following figures**

### Detailed area in Figure 2

Rock chip samples were taken mainly of quartz veins from spoil piles (miners' rejects) at the artisanal workings which returned very high-grade results including **79.50g/t Au**, **60.66g/t Au**, **9.40g/t Au**, and **7.45g/t Au**. The majority of the quartz veins are oriented east-west and dip to the south. The two wide spaced (400m) drill fences were drilled to the east and **would likely not have intersected the east-west gold-bearing structures**. Future drilling in this area will test the newly identified east-west structure by drilling to the north to intersect the high-grade veins.

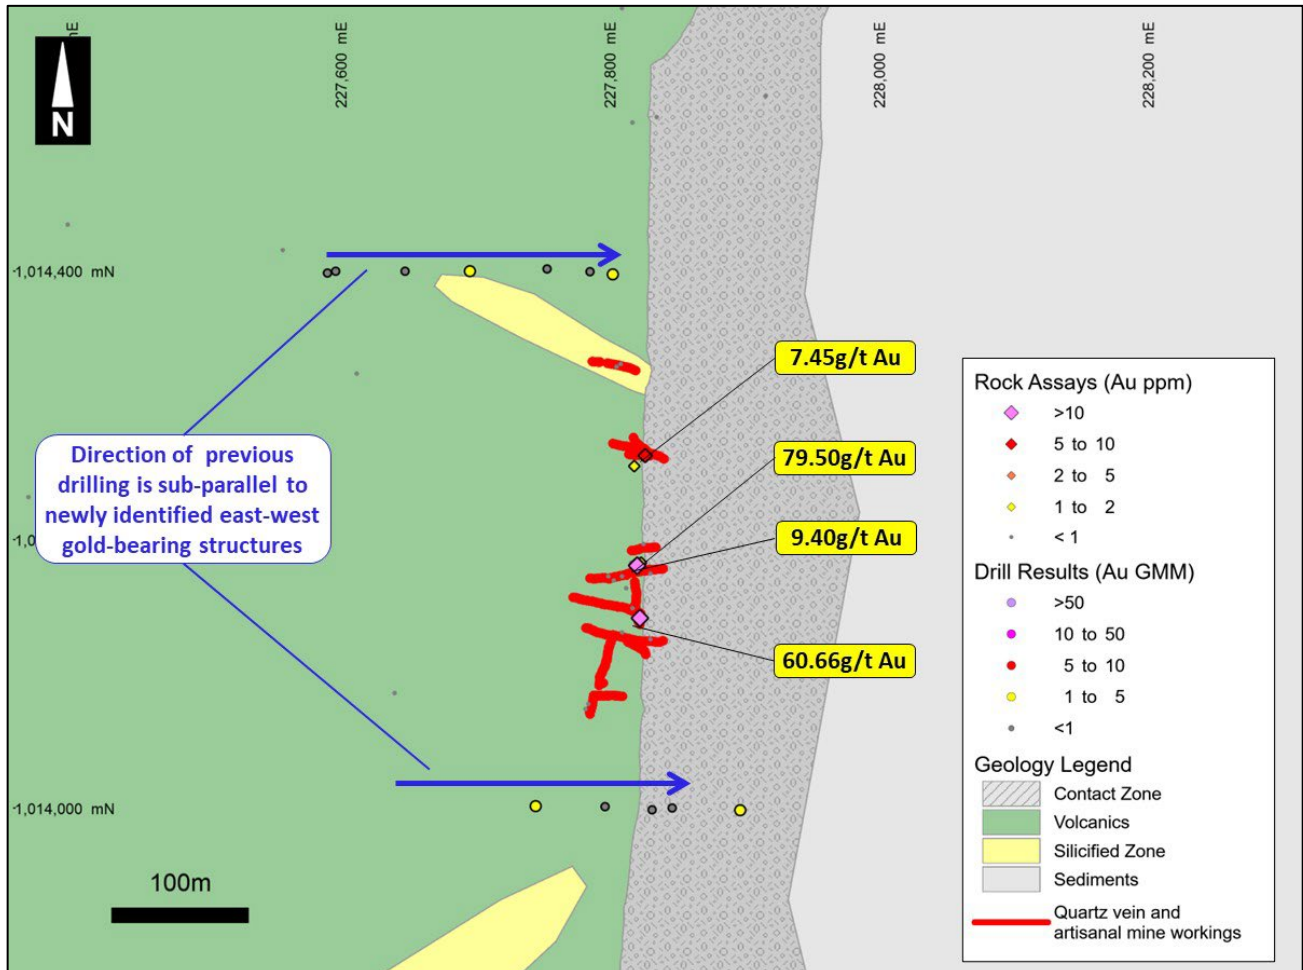

**Figure 2: High-grade rock chips results along new east-west structures in artisanal workings with gold-bearing quartz veins – note that the majority of veins are east-west and previous drilling would not have intersected the east-west structures**

A photo of the sample which returned 79.50g/t Au is shown on Figure 3.





**Figure 3: Rock chip sample of quartz veins from spoil pile which returned 79.50g/t Au**

#### **Detailed area in Figure 4**

Rock chip samples of quartz veins were taken from spoil piles (miners' rejects) at the artisanal workings. These returned very high-grade results including **44.73g/t Au**, **6.29g/t Au**, and **2.68g/t Au**. All of the quartz veins are oriented approximately east-west and dip to the south.


**The results returned from this area demonstrate the potential for the western greenstone/granite contact to host high-grade gold.**

Only a few exploration holes have been drilled in this area with results up to **1m at 44.86g/t Au** in reverse circulation (RC) drilling and **4m at 101g/t Au** in air core (AC) drilling.<sup>1</sup>

The quartz vein from the drill hole which returned 1m at 44.86 g/t Au may be a north-south oriented vein. **This is very promising as it suggests that there may be two sets of veins which host high-grade gold in this area.** Future drilling will focus on the newly identified east-west veins by drilling north-south.

---

<sup>1</sup> Refer ASX releases dated 1 June 2022 and 13 July 2023

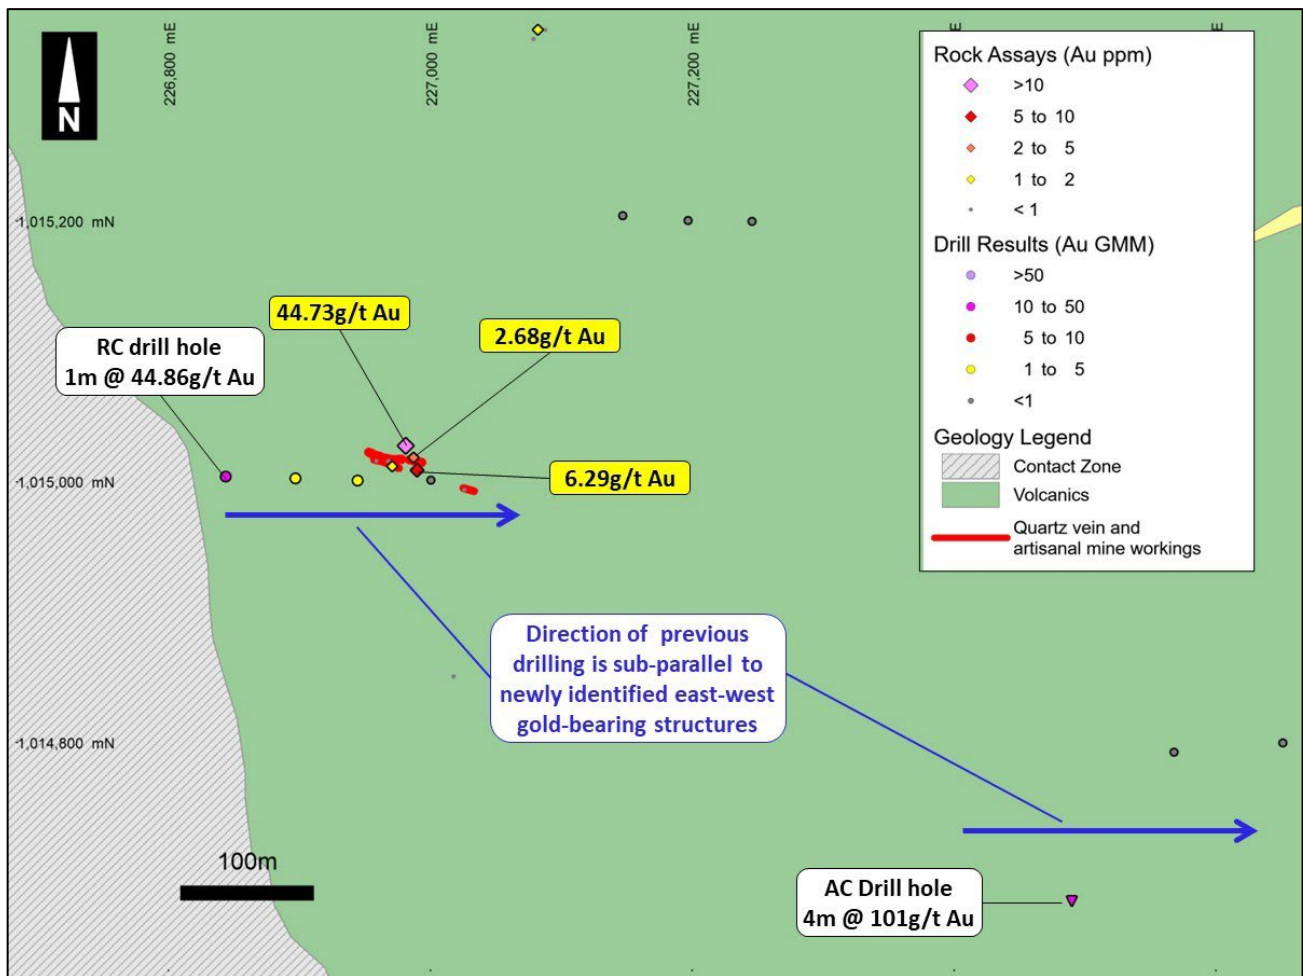


**Figure 4: High-grade rock chips results along new east-west structures in artisanal workings with gold-bearing quartz veins – note that the majority of veins are east-west and previous drilling would not have intersected the east-west structures**

#### **Detailed area in Figure 5**

Rock chip samples were collected from the spoil piles yet still returned values up to **9.47g/t Au**. The Company considers the artisanal mining site a very high-priority high-grade target which will be drilled during the next drill program at Napié. The artisanal site measures over 200m in length and is approximately 30-40 metres deep. Based on the depth of the workings it is assumed that the artisanal miners are recovering very high-grade ore, especially since their spoil piles have grades as high as 9g/t Au.

The high-grade rock chip results as well as the deep artisanal mining site **confirm the western greenstone/granite contact as being a valid high-grade target for future drilling.**



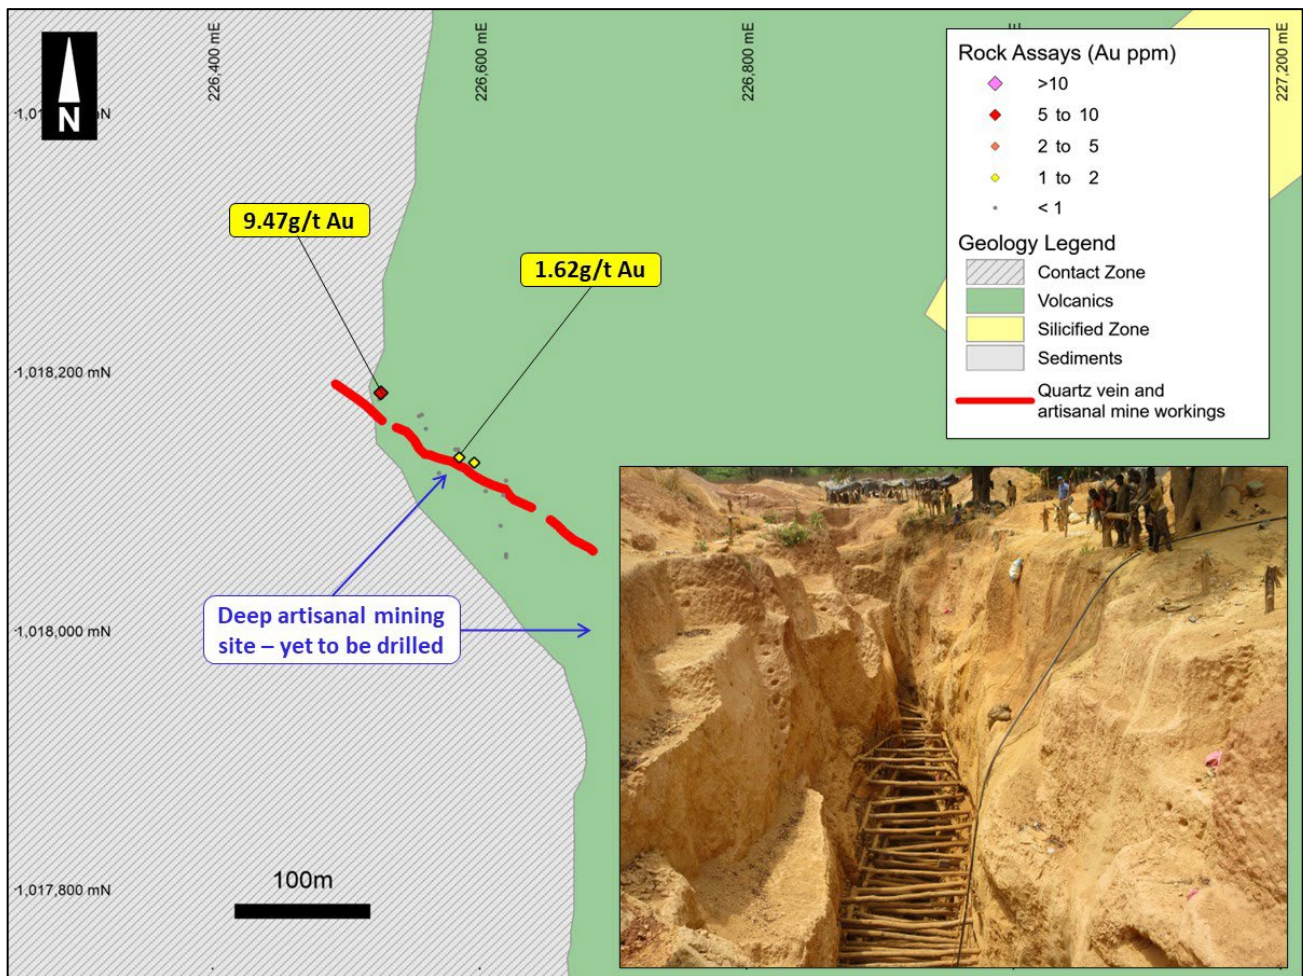

**Figure 5: Rock chip samples from spoil piles returned good values even though they were collected from miners' rejects – this site has yet to be drilled and will be tested during the next drill program**

### Next steps

- ❖ Complete the mapping and rock chip sampling at Tchaga North. Once assays are received, results will be announced, and new drill holes will be planned to target high-grade gold at the new prospective areas identified by the ongoing mapping/rock chip sampling program.

This announcement has been approved by the Board of Mako Gold.

### For further information please contact:

#### Peter Ledwidge

Managing Director

Ph: +61 417 197 842

Email: [pledwidge@makogold.com.au](mailto:pledwidge@makogold.com.au)

#### Paul Marshall

Company Secretary/CFO

Ph: +61 433 019 836

Email: [pmarshall@makogold.com.au](mailto:pmarshall@makogold.com.au)

**Competent Person's Statement**

The information in this report that relates to Exploration Results is based on information compiled by Mrs Ann Ledwidge B.Sc.(Hon.) Geol., MBA, who is a Member of The Australian Institute of Geoscientists (AIG). Mrs Ledwidge is a full-time employee and a shareholder of the Company. Mrs Ledwidge has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which she is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mrs Ledwidge consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

**Compliance Information**

The information in this report that relates to Mineral Resources is extracted from the announcement "Mako Delivers 868koz Maiden Resource to Provide Strong Growth Platform at Napié" released to the Australian Securities Exchange on 14 June 2022 and available to view on [www.makogold.com.au](http://www.makogold.com.au). The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

**Disclaimer**

This Announcement ("Announcement") is for informational purposes only and is not a prospectus, disclosure document or offer document under the Corporations Act 2001 (Cth) ("Corporations Act") or any other law. This Announcement does not constitute, and is not to be construed as, an offer to issue or sell, or a solicitation of an offer or invitation to subscribe for, buy or sell securities in Mako Gold Limited ACN 606 241 829 ("Mako"). The material in this announcement has been prepared by the Company and contains summary information about the Company's activities. The truth or accuracy of the information in this announcement cannot be warranted or guaranteed by the Company. The information in this announcement is of a general background nature and does not purport to be complete or contain all the information security holders would require to evaluate their investment in the Company. It should be read in conjunction with the Company's other periodic and continuous disclosure announcements which are available at [www.makogold.com.au](http://www.makogold.com.au). Other than to the extent required by law (and only to that extent) the Company and its officers, employees and professional advisors make no reannouncement or warranty (express or implied) as to, and assume no responsibility or liability for, the contents of this announcement.

This Announcement does not purport to contain all information that recipients may require to make an informed assessment of Mako or its securities. Statements in this Announcement are made only as at the date of this Announcement unless otherwise stated and remain subject to change without notice. No reannouncement or warranty, express or implied, is made as to the fairness, accuracy or completeness of the information or opinions contained in this Announcement, or any omission from this Announcement. To the maximum extent permitted by law, Mako disclaims any responsibility to inform any recipient of this Announcement on any matter that subsequently comes to its notice which may affect the information contained in this Announcement, and undertakes no obligation to provide any additional or updated information whether as a result of new information, future events or results or otherwise.

**Not financial product advice or offer**

Information in this announcement, including forecast financial information, should not be considered as advice or a recommendation to investors or potential investors in relation to holding, purchasing or selling securities. Before acting on any information, you should consider the appropriateness of the information having regard to these matters, any relevant offer document and in particular, you should seek independent financial advice.

**ABOUT MAKO GOLD**

Mako Gold Limited (**ASX:MKG**) is an Australian based exploration Company focused on advancing its flagship Napié Gold Project (224km<sup>2</sup>) in Côte d'Ivoire located in the West African Birimian Greenstone Belts which hosts more than 70 +1Moz gold deposits. Senior management has a proven track record of high-grade gold discoveries in West Africa and aim to deliver significant high-grade gold discoveries.

On 14 June 2022, a maiden Mineral Resource Estimate was reported in accordance with JORC (2012) at Tchaga and Gogbala.

Deposit	Category	Tonnes (Mt)	Grade (g/t Au)	Au (koz)
Tchaga	Inferred	14.6	1.16	545
Gogbala	Inferred	7.8	1.29	323
<b>Global Resource</b>	<b>Total</b>	<b>22.5</b>	<b>1.20</b>	<b>868</b>

*Resources reported at a cut-off grade of 0.6g/t gold. Differences may occur in totals due to rounding.*

Mako Gold entered into a farm-in and joint venture agreement on the Napié Permit with Occidental Gold SARL, a subsidiary of West African gold miner Perseus Mining Limited (ASX/TSX:PRU) in 2017<sup>1</sup>. Subsequently Mako renegotiated the agreement with Perseus and has now **consolidated its ownership in the Napié Project from 51% to 90%**<sup>2</sup>.

In addition, Mako Gold has 100% ownership of the Korhogo Project comprising of the Ouangolodougou and Korhogo Nord permits (296km<sup>2</sup>) covering 17km of faulted greenstone/ granite contact (high-grade gold targets) located within 30km of Barrick's operating Tongon Gold Mine (4.9Moz Au) in a highly prospective greenstone belt that also hosts Montage Gold's 4.5Moz Kone gold deposit, both located in Côte d'Ivoire, as well as Endeavour's 2.7Moz Wahgnion gold mine across the border in Burkina Faso (Figure 6). The Company **recently announced a manganese discovery on the Ouangolodougou permit**<sup>3</sup>.

<sup>1</sup> For details of the agreement please refer to Section 9.1 of Mako Gold's Prospectus and section 4.6 of Mako Gold's Supplementary Prospectus, lodged on the ASX on 13 April 2018, and ASX release dated 29 June 2021

<sup>2</sup> Refer to ASX releases dated 29 June 2021 and 21 October 2022

<sup>3</sup> Refer to ASX release dated 26 April 2023



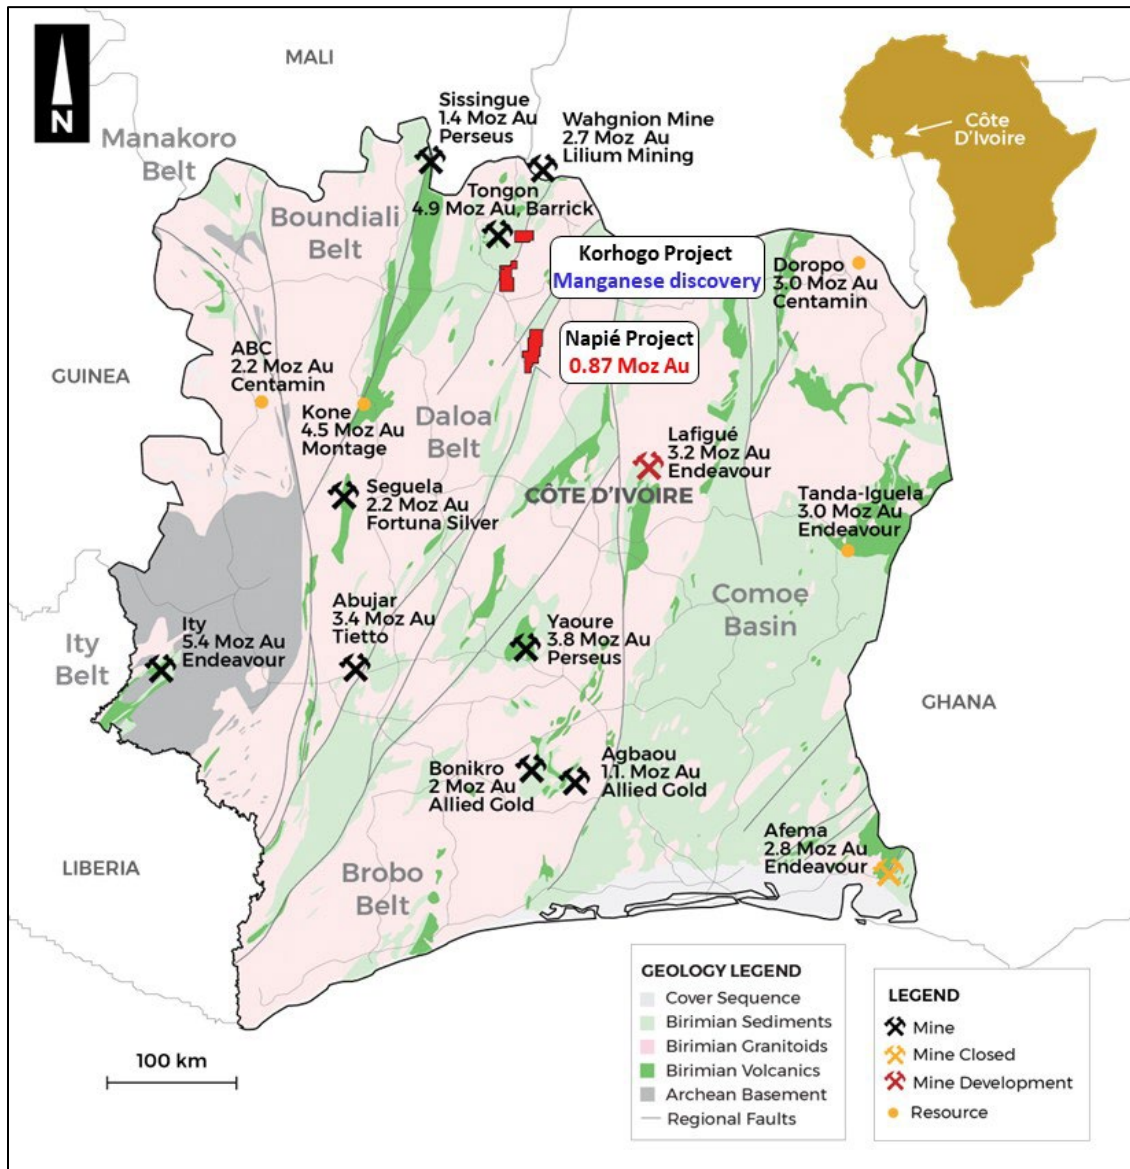


Figure 6: Côte d'Ivoire - Mako projects on simplified geology with mines and deposit

## Appendix 1 - Summary of rock chip sampling result over 0.5g/t Au

Sample No.	East (WGS84)	North (WGS84)	Method	Lith	Au (g/t)
114846	227821	1014182	SPOIL	QVN	<b>79.5</b>
114844	227823	1014143	SPOIL	QVN	<b>60.66</b>
114831	226981	1015029	SPOIL	QVN	<b>44.73</b>
114841	226526	1018185	SPOIL	QVN	<b>9.47</b>
114824	227820	1014182	SPOIL	VTA	<b>9.4</b>
114849	227827	1014264	SPOIL	QVN	<b>7.45</b>
114830	226990	1015010	SPOIL	QVN	<b>6.29</b>
114828	226987	1015020	SPOIL	QVN	2.68
114808	227776	1012787	ARTISANAL	VTA	1.95
114836	226585	1018135	SPOIL	QVN	1.62
114848	227819	1014256	SPOIL	QVN	1.23
114825	227824	1014184	SPOIL	QVN	1.18
114816	227953	1012976	SPOIL	QVN	1.09
114821	227818	1014149	SPOIL	QVN	0.93
114853	227813	1014164	SPOIL	VXY	0.77
114845	227817	1014183	SPOIL	VTA	0.55
114839	226557	1018167	SPOIL	QVN	0.54

QVN - quartz vein

VTA – volcanic andesitic tuff

SPOIL – collected from the loose piles of rock adjacent to the artisanal mining pit

ARTISANAL – collected from within the artisanal mining pit

## Appendix 2 - JORC 2012 Table 1 Reporting

### Section 1 - Sampling techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>This report relates to results for rock chip sampling conducted during geological mapping of the Western Contact Area on the Napié Permit. Approximately 2-3kg of rock chips were collected at a sample site and placed along with a tag printed with a unique identifying sample number in a large plastic bag also labelled with the sample number.</p> <p>Rock chip samples were collected from in-situ material from outcrop or artisanal mine workings, whilst rock "spoil" samples were collected from loose material in or adjacent to artisanal mining pits. Random chips were collected to be as representative as possible, however they are point samples and results can vary over a small area.</p> <p>Samples were submitted to Intertek in Côte d'Ivoire for sample preparation during which the field sample was dried, the entire sample crushed to 70% passing 2mm, with a 1.5kg split by riffle splitter pulverized to 85% passing 75 microns in a ring and puck pulveriser. From this, a 200g subsample was collected and assayed for gold by 50g fire assay with AAS finish at Intertek's laboratory in Ghana.</p>
<b>Drilling techniques</b>	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	Not applicable to rock sampling.
<b>Drill sample recovery</b>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	Not applicable to rock sampling.
<b>Logging</b>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>Mako Gold geologists recorded geological descriptions of the rock chips and the setting in which they were collected.</p> <p>Descriptions are qualitative in nature. Structural measurements from outcrop are quantitative in nature.</p>



Criteria	JORC Code explanation	Commentary
<b>Sub-sampling techniques and sample preparation</b>	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>Industry standard sample preparation is conducted under controlled conditions within the laboratory and is considered appropriate for the sample types.</p> <p>Regular reviews of the sampling were carried out by the supervising geologist to ensure all procedures were followed and best industry practice carried out. Sample sizes and preparation techniques are considered appropriate.</p> <p>Rock chip assay results are reviewed in areas with reported gold to visually ascertain that results are consistent with the style of mineralisation expected.</p> <p>The sample sizes are considered to be appropriate for the nature of mineralisation within the project area.</p>
<b>Quality of assay data and laboratory tests</b>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<p>Samples were assayed at Intertek in Ghana using 50g fire assay for gold which is considered appropriate for this style of mineralisation. Fire assay is considered total assay for gold.</p> <p>No geophysical tools have been used to determine assay results for any elements.</p> <p>Monitoring of results of duplicates, blanks and standards is conducted regularly.</p> <p>Internal laboratory QAQC checks are reported and reviewed regularly by Mako's Database Geologist. Any issues flagged through Mako's QAQC protocols are documented and corrective action noted in the Mako database.</p>
<b>Verification of sampling and assaying</b>	<p><i>The verification of significant intersections by either independent or alternative Company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.</i></p>	<p>Mako's Chief Geologist conducted field visits as part of the verification process.</p> <p>No twinning of holes was undertaken in this program. This announcement refers only to rock chip results.</p> <p>Primary data is collected on field sheets and then compiled on standard Excel templates which is uploaded into the database for validation and data management. The database is maintained in Seequent MXDeposit.</p> <p>All samples returning assay values below detection limit are assigned a value of 0.005g/t Au (half of the lower detection limit). No other adjustments have been applied to assay data.</p>
<b>Location of data points</b>	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<p>Sample points are recorded directly into a hand-held GPS with a location error of +/- 5m. Elevations are extracted from digital terrain model data as handheld GPS elevations are inconsistent.</p> <p>The grid system used is WGS84. A northern hemisphere zone is applied that is applicable to the location of individual project areas.</p> <p>A detailed topographic survey of the project area has not been conducted but digital terrain model data is available as part of the airborne geophysical survey that was flown.</p>
<b>Data spacing and distribution</b>	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<p>Rock chip sampling had no set spacing and samples were collected where suitable material (eg. Outcrop etc) could be obtained. Outcrop is sparse on Napié and artisanal mine workings provided good exposure in areas that would otherwise not be able to be rock chip sampled.</p> <p>The results reported have not been used to estimate any mineral resource or reserve.</p> <p>No sample compositing was done for exploration results.</p>

Criteria	JORC Code explanation	Commentary
<b>Orientation of data in relation to geological structure</b>	<p>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</p> <p>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</p>	<p>Rock chips have been collected as random chips from outcrop or spoil piles with no orientation to the sampling.</p> <p>Structural measurements of recently mapped quartz veins and the trend of artisanal workings indicates a new mineralised trend of approximately 110 degrees (roughly east-west) in the Western Contact Zone area.</p> <p>Previously it was thought that only the main north-south, and north-northeasterly structures were mineralised and previous drill directions were based on this. As such, the new east-west orientation has not yet been drill tested.</p>
<b>Sample security</b>	<i>The measures taken to ensure sample security.</i>	<p>Samples are stored securely on the project site under supervision of security guards and/or Company personnel. Company personnel maintain chain of custody of the samples prior to collection from site by laboratory personnel.</p> <p>Documentation is prepared to record handover of samples to laboratory personnel.</p>
<b>Audits or reviews</b>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews have been conducted on rock chip sampling techniques and data.

## Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	<p>The Napié Permit (PR281) was granted to Occidental Gold SARL, a 100% owned, Ivorian registered, subsidiary of Perseus Mining Ltd, by decree No. 2012-1164 on 19th December 2012 and was valid for three years. The first, three-year, renewal of the permit was granted to Occidental Gold by decree No: 181 /MIM/DGMG DU on 19 December 2016. The second, three-year renewal was granted to Occidental Gold by decree No: 00018/MIM/DGMG on 21 March 2019. The exceptional renewal of the Napié permit for a further two years was granted to Occidental Gold SARL on 7 March 2022 by decree No: 00083/MMPE/DGMG. Decree No: 259/MMPE/DGMG dated 8 September 2022 transferred Occidental Gold's ownership to Mako CI sarlu, a 100% owned, Ivorian registered, subsidiary of Mako Gold Ltd. This transaction gives Mako 90% ownership of the Napié Permit. A new application was submitted for the Napié Permit on 19 December 2023. Refer to Mako's ASX announcement of 21 October 2022 regarding the history of Napié ownership and details of the underlying agreement. The size of the permit is 224km<sup>2</sup>.</p> <p>The Korhogo Nord permit was granted to Mako Côte d'Ivoire SARLU, a 100% owned Ivorian registered subsidiary of Mako Gold Ltd, by decree No. 2020-578 on 29 July 2020 and is valid for 4 years with two renewals of three years each. The size of the permit is 185km<sup>2</sup>. The Ouangolodougou permit was granted to Mako Côte d'Ivoire SARLU, a 100% owned Ivorian registered subsidiary of Mako Gold Ltd, by decree No. 2020-938 on 25 November 2020 and is valid for 4 years with two renewals of three years each. The size of the permit is 111km<sup>2</sup>. The tenements are in good standing and no known impediments exist.</p>
<b>Exploration done by other parties</b>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Previous exploration on Napié was conducted by Occidental Gold and consisted of surface geochemical sampling, auger sampling, an airborne geophysical survey and interpretation, RAB drilling and limited RC drilling (2 holes). Refer to Section 4.6 and Annexure A of Mako Gold's Prospectus lodged on the ASX on 13 April 2018 for details on previous exploration.

Criteria	JORC Code explanation	Commentary
<b>Geology</b>	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>The Napié Permit is located within the Lower Proterozoic Birimian Daloa greenstone belt. The style of mineralisation sought is structurally controlled orogenic gold, within interpreted shear zones related to a regional-scale shear and secondary splays.</p> <p>The Tchaga and Gogbala deposits are located along a 23km long +40ppb gold soil/auger anomaly coincident with a +30km-long shear zone, thought to be a major control for gold mineralisation. Gold mineralisation is hosted in en-echelon quartz veins and stringers and the surrounding silicified, sericite, iron-carbonate, pyrite (+/- galena and chalcopyrite) alteration halo. Mineralisation is present in all lithologies (felsic to mafic volcanoclastics, volcanic breccias and conglomerates and to a lesser extent in felsic and mafic intrusives). The Gogbala South, Tchaga North and Komboro Prospect shows similarities to Tchaga and Gogbala mineralisation and is associated with splays off the main Napié shear.</p>
<b>Drill hole Information</b>	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> <li>○ easting and northing of the drill hole collar</li> <li>○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>○ dip and azimuth of the hole</li> <li>○ down hole length and interception depth</li> <li>○ hole length.</li> </ul>	Not applicable to rock sampling.
<b>Data aggregation methods</b>	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p>A nominal 0.5g/t gold cutoff grade was applied for reporting of exploration in Appendix 1.</p> <p>No high-grade cuts have been applied to the reporting of exploration results.</p> <p>No metal equivalent values have been used for reporting exploration results.</p>
<b>Relationship between mineralisation widths and intercept lengths</b>	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></p>	Not applicable to rock sampling.
<b>Diagrams</b>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to Figures contained within this report for the location and results of rock chip samples.
<b>Balanced reporting</b>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All rock chip results are shown graphically on the maps within this report.
<b>Other substantive exploration data</b>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	No other exploration data that is considered meaningful and material has been omitted from this report



Criteria	JORC Code explanation	Commentary
<b>Further work</b>	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Mako has only systematically explored and defined Mineral Resources over 4km of the +30km long mineralised Napié Shear Zone. Further RC and DD drilling is planned to test high priority extensional targets along strike in the immediate area of Tchaga and Gogbala as well as to follow up recent exploration success in new prospect areas. Mapping and rock chip sampling is ongoing to help with prioritisation of drill targets.